


HAND HOIST YAL



Galv. Steel wire rope mounted on a reel ▶
Every rope is operationally tested to 150% of the rated capacity and is issued with an individual test certificate

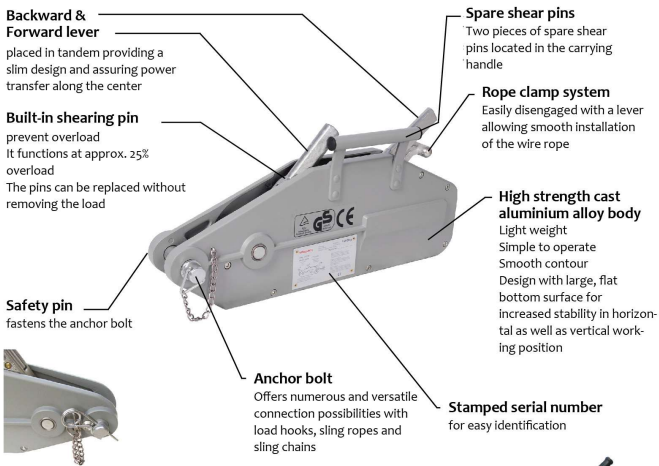

Adjustable lever handle
for easy operation




Remarks: Hand hoist is also called as jaw winch



Optional Feature:

Front hook fixed into the anchor bolt and fastened by castle nut and split pin (for 1.6 t & 3.2 t only)

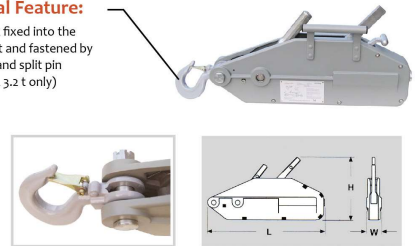

Model No.		YAL008	YAL016	YAL032	YAL054
Lifting Capacity (Rated Load)	(tonnes)	0.8	1.6	3.2	5.4
* Pulling Capacity	(tonnes)	1.2	2.4	4	8.1
Lever Pull at Rated Load	(N)	284	412	441	850
Forward Travel	(mm)	52	55	28	25
Wire Rope Diameter	(mm)	8.3	11	16	20
Net Weight (Body)	(kg)	6.4	12.4	23.3	58
Net Weight (20 metres Wire Rope)	(kg)	7	11.5	23.5	36
Net Weight (Lever Handle)	(kg)	1.15	2.5	2.5	3.7
Dimensions (Body) L x W x H	(mm)	440 x 70 x 255	560 x 100 x 295	675 x 120 x 350	940 x 170 x 440

*Observe local regulations

